



PROFIVE® NUCR_C



APPLICATIONS

The **PROFIVE® NUCR** was designed as a low power eNUC board with an excellent performance-per-watt ratio and is optimal adapted for:

- _ AI Systems
- _ ML Machine Learning
- _ CV Computer Vision
- _ Robotics
- _ Mobile Systems
 - automotive power supply
- _ Rugged Industrial Systems
 - no rotating parts, low power
- _ Medical Solutions
 - AMD Ryzen™ performance
- _ IoT
 - edge / fog gateway

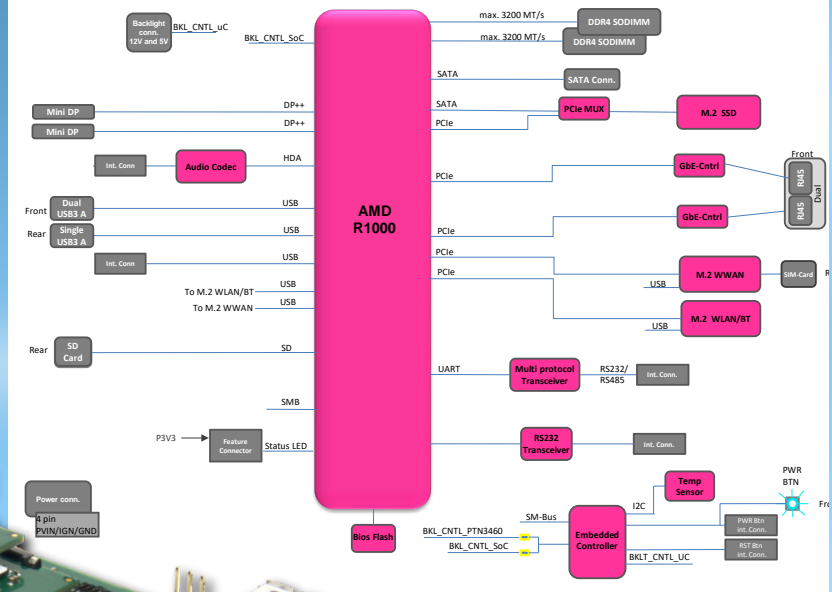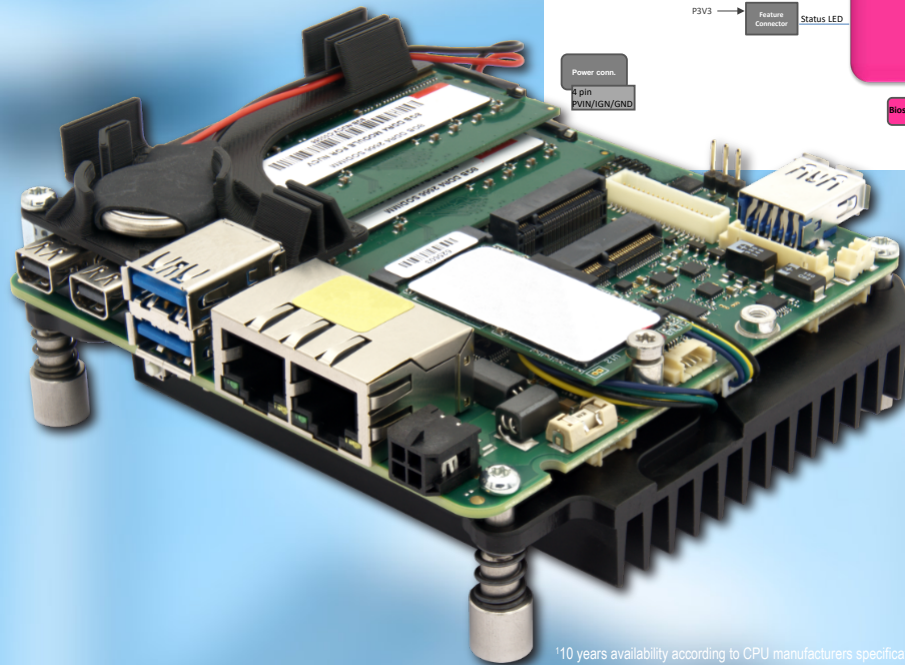

¹10 years availability according to CPU manufacturers specification

HIGH QUALITY
MADE IN GERMANY

10 years
long life
support¹



E.E.P.D.
...just embedded!


eNUC 101x101

SPECIFICATIONS

CPU	AMD R1000 series ¹ , up to 3.5 GHz
Max. memory	32 GB dual channel DDR4 memory
Gigabit Ethernet	2 Intel® I210 with IEEE1588
SD-Card	1 MicroSD-Card socket
M.2 socket	1 Key B, 30 mm x 42 mm with onboard SIM Card socket 1 Key E, 22 mm x 30 mm 1 Key M, 22 mm x 42 mm (for NVMe and SATA only)
Serial ATA	1 (6G) with separate power connector
USB ports	1 Dual USB 3.1 Gen2 (10Gb/s, limited by fuse to: 900mA each) 1 Rear USB 3.1 Gen2 (10Gb/s, limited by fuse protection to: 900mA each)
Serial ports	1 RS-232 1 RS-232/485 (FDX)
DP connector	2 Mini-DP++ connectors up to 4096 x 2160 @ 60 Hz
Sound	HDA with MIC In / headphone Out
Health monitoring and management	Controllable FAN (PWM + Tacho), hardware monitoring and watchdog
Other	Power and status LEDs, 2 GPIO (3.3V)
Power supply	Min. 8 V / Max. 32 V (DC) automotive grade KL15
Max. operating temp.	0°C to +60°C ambient commercial grade; other on request
Max. storage temp.	-40°C to +85°C
Max. relative humidity	95% @ 40°C, non-condensing
Size approx.	113 mm x 46 mm x 109 mm
Weight approx.	330g + options
OS support	Microsoft® Windows® 10; Microsoft® Windows® 10 IoT Enterprise; Linux Ubuntu 20.04 LTS

Ordering Code CPU	Description	Type
NUCREO1	eNUC	R1102G / 2C / 2T / 1.2 GHz - 2.6 GHz / 6 W
NUCRHO1	eNUC	R1305G / 2C / 4T / 1.5 GHz - 2.8 GHz / 8 - 10 W
NUCRFO1	eNUC	R1505G / 2C / 4T / 2.4 GHz - 3.3 GHz / 12 - 25 W
NUCRGO1	eNUC	R1606G / 2C / 4T / 2.6 GHz - 3.5 GHz / 12 - 25 W


Ordering Code Memory	Description	Size
4GB-NUCVX_C	Main Memory	4GB
8GB-NUCVX_C	Main Memory	8GB
16GB-NUCVX_C	Main Memory	16 GB

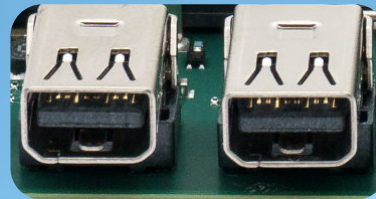

Dual-Mini-DP-Support
Single Display Max. 4096 x 2160 @ 60 Hz



Dual Gigabit Ethernet

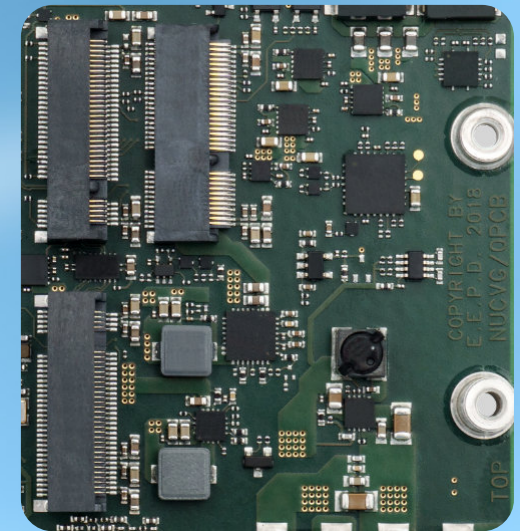

Triple M.2 Sockets / WLAN_BT / 4G_5G / NVME_SATA


The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. AMD® and AMD® logo are trademarks or registered trademarks of Advanced Micro Devices, Inc. or its subsidiaries in the United States and other countries.

This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.

LIFE SUPPORT APPLICATIONS

E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.

©2021 by E.E.P.D. GmbH. All rights reserved. October 27 2021 - Version 1.5



**E.E.P.D. Electronic Equipment
Produktion & Distribution GmbH**
Gewerbering 3
85258 Weichs - Germany
Phone +49 8136 2282-0
Fax +49 8136 2282-109
Internet: www.eepd.de
E-Mail: sales@eepd.de