
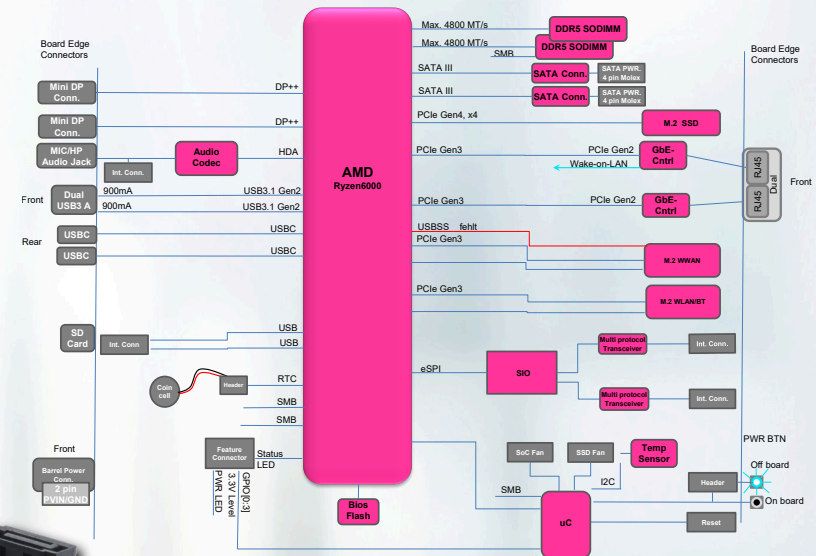


PROFIVE® NUCS_C 28W

APPLICATIONS

The PROFIVE® NUCS with AMD Ryzen™ PRO 6000 was designed as a low power eNUC board with an excellent performance-per-watt ratio. With “Zen 3” architecture and RDNA 2 iGPU it is ideally suited for:

- _ CV Compute Vision
- _ High-Performance Workstations
- _ AI Systems
- _ Medical Solutions
- _ ML Machine Learning
- _ Robotics
- _ Micro-Server
- _ Rugged Industrial Systems
 - no rotating parts, low power
- _ IoT
 - edge / fog gateway

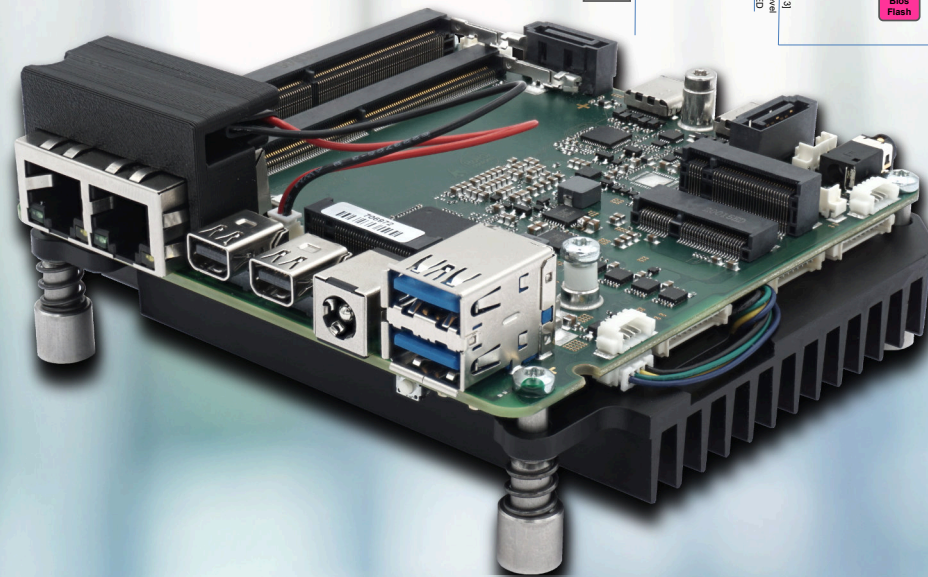

HIGH QUALITY
MADE IN GERMANY

AMD
RYZEN
PRO

 5 years
form | fit | function


E.E.P.D. 
...just embedded!

eNUC 101x101

SPECIFICATIONS

CPU	AMD Ryzen™ PRO 6000 series up to 4.7 GHz, up to 8 cores, 16 threads, max. 28W supported
Max. memory	64 GB dual channel DDR5 SO-DIMM memory with ECC-support
Gigabit Ethernet	2 Intel® I226 with 2,5 Gbit/s TSN-support Wake-On-LAN supported by one port
M.2 socket	1 Key B, 30 mm x 42 mm with onboard SIM Card socket 1 Key E, 22 mm x 30 mm 1 Key M, 22 mm x 80 mm (for NVMe only)
Serial ATA	2 (6G) with separate power connector each
USB ports	1 Dual USB 3.1 Gen2 (10Gb/s, limited to: 900mA each)
USB-C connector	2 USB-C 3.1 Gen2 or 2 DP++ / ALT-Mode support (10Gb/s, limited to: 1500mA)
DP connectors	2 Mini-DP++ connectors up to 4096 x 2160 @ 60 Hz
Serial port	2 RS-232/485 (HDX/FDX)
Sound	HDA with MIC in / Headphone out at a 3.5 mm Audio Jack / Line in / Line out
fTPM / TPM	AMD firmware Trusted Platform TPM 2.0 support (Infineon SLB 9670)
Health monitoring and management	Controllable FAN (PWM + Tacho) Hardware monitoring and watchdog
Other	Power and status LEDs, max. 4 GPIO (3.3V) and max. 3 GPO with PWM (3.3V/50kHz)
Power supply	Min. 10.8 V / Max. 26.4 V (DC)
Max. operating temp.	0°C to +60° ambient commercial grade; other on request
Max. storage temp.	-40°C to +85°C
Max. relative humidity	95% @ 40°C, non-condensing
Size approx.	113 x 46 x109 mm
Weight approx.	330g + options
OS support	Microsoft® Windows® 11 Microsoft® Windows® 10 IoT Enterprise Microsoft® Windows® 10 Linux Ubuntu 20.04 LTS


Ordering code	Description	Type / Size
NUCSACO	SBC	6650U 6C 12T 2.9 GHz - 4.5 GHz 15 - 28W
NUCSBCO	SBC	6850U 8C 16T 2.7 GHz - 4.7 GHz 15 - 28W
4GB-NUCS	Main Memory	4GB
8GB-NUCS	Main Memory	8GB
16GB-NUCS	Main Memory	16GB
32GB-NUCS	Main Memory	32GB



Dual-Mini-DP-Support
Single Display Max. 4096 x 2160 @ 60 Hz



Dual 2.5 Gigabit Ethernet

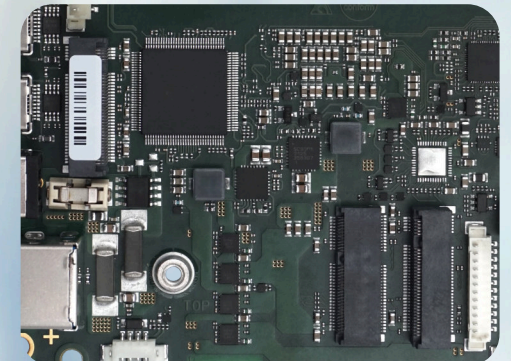

Triple M.2 Sockets | 1x 2280 NVMe support

The information contained in this document has been carefully checked and is believed to be reliable. However, E.E.P.D. GmbH makes no guarantee or warranty concerning the accuracy of said information and shall not be responsible for any loss or damage of what ever nature resulting from the use of, or reliance upon, it. E.E.P.D. does not guarantee that the use of any information contained herein will not infringe upon the patent, trademark, copyright or other rights of third parties, and no patent or other license is implied hereby. AMD and the AMD logo are trademarks of Advanced Micro Devices, Inc. Intel and the Intel logo are trademarks of Intel Corporation or its subsidiaries in the U.S. and/or other countries.

This document does not in any way extend E.E.P.D.'s warranty on any product beyond that set forth in its standard terms and conditions of sale. E.E.P.D. reserves the right to make changes in the products or specifications, or both, presented in this publication at any time and without notice.

LIFE SUPPORT APPLICATIONS

E.E.P.D.'s products are not intended for use as critical components in life support appliances, devices or systems in which the failure of a E.E.P.D. product to perform could be expected to result in personal injury. All mentioned trademarks are registered trademarks of their owner.

©2024 by E.E.P.D. GmbH. All rights reserved. November 13 2024 - Version 1.5

**E.E.P.D. Electronic Equipment
Produktion & Distribution
GmbH**

Gewerbering 3
85258 Weichs - Germany
Phone +49 8136 2282-0
Fax +49 8136 2282-109
Internet: www.eepd.de